

BLINKING LAMP

TYPE **BL6**

surface mounted

General description

External blinking lamps are used to indicate short-circuits or earth-faults in outdoor areas. The blinking lamp type BL6 is incorporated in an M10 x 40 mm screw (IP67) with inconspicuous looks for best protection against vandalism. The lighting angle of the LED is 35 degrees. The energy is sourced from the display device.

Please note: The blinking lamp BL6 is fully compatible with the blinking lamps type BL3.1/ BL4.1. Thus it can be connected to all BL3.1 and BL4.1 connectors (please refer to figure 1).


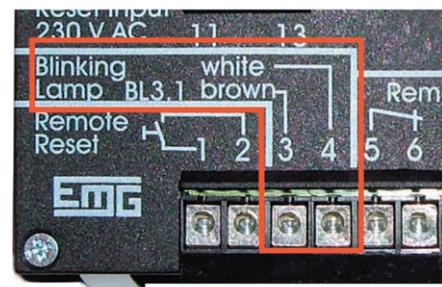


figure 1 - example of blinking lamp connector (can be also used for BL4.1 and BL6)

General data

Subject	Value
housing	suitable for surface, outdoor installation weather-proof, protected against vandalism
protection class	IP67
indication	one bright LED indicator, blinking frequency depends on display unit (standard 1 Hz)
duration of indication	blinking duration depends on display unit
dimensions	10 mm x 40 mm (Please also refer to drawings below)
operation temperature range	-40°C to +70°C
power supply	power is supplied by the display unit
connection cable	standard length: 3m * (copper cable)

***Please note:** other values can be ordered

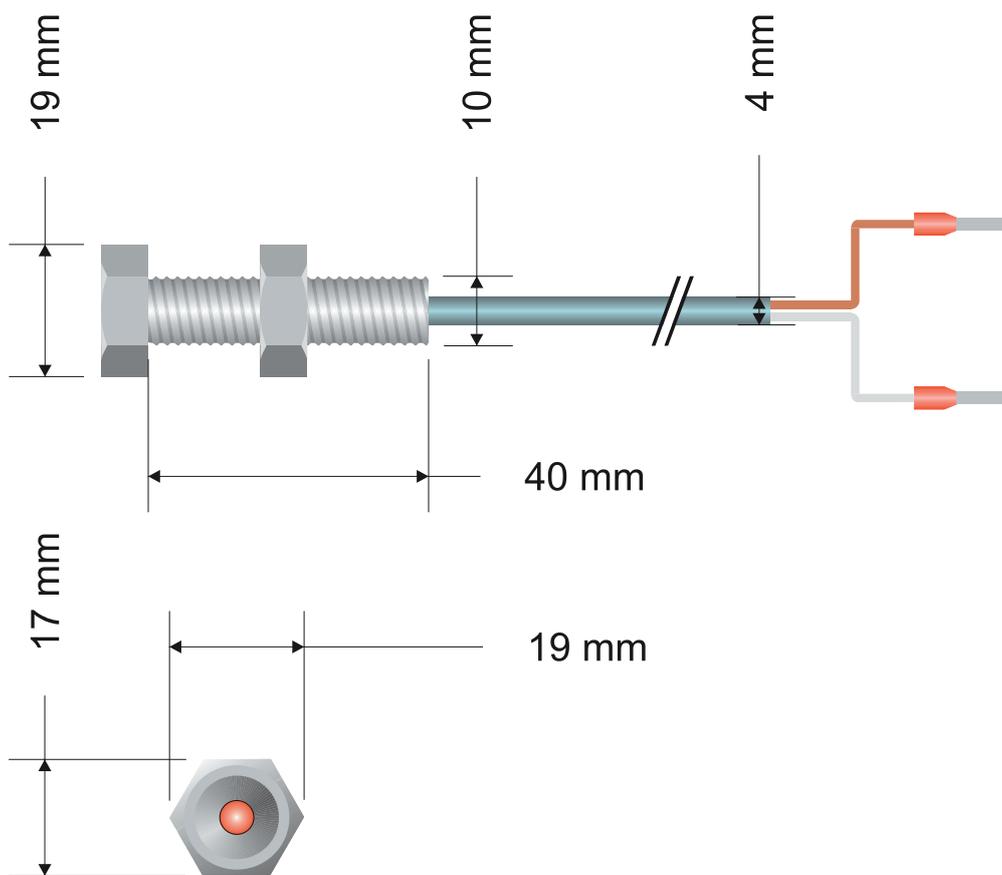

44.1756.01